

Type PFCS, 3-Phase AC Power Factor Correction Capacitors



Type PFCS 3-phase series capacitors are designed for power factor correction in automatic PFC controllers. Each PFCS capacitor is made with three self-healing metallized polypropylene windings, connected in delta, enclosed in a cylindrical aluminum case and filled with an environmentally friendly fluid.

Highlights

- For 3-phase AC Power Factor Correction
- Delta connected
- Discharge resistors included
- UL810 approved internal pressure interrupter

Specifications

Capacitance Tolerance	0 to +10%
Rated Frequency (f_R)	50 Hz and 60 Hz
Rated AC Voltages (V_R)	240 Vac, 480 Vac, 600 Vac
Operating Temperature Range	-40 °C to +55 °C
kvar Range	0.5 kvar to 30.2 kvar
Maximum Permissible Voltage (V_{max})	110% of rated rms voltage 120% of rated peak voltage ($1.2 \times \sqrt{2} \times V_{rms}$)
Internal Connection	Delta (Δ)
Maximum Permissible Current (I_{max})	135% of nominal rms current based on rated kvar and rated voltage - (up to 150% of I_R including combined effects of harmonics, over voltages and capacitances, tolerance)
Life	60,000 h w/94% survival rate
International Standards	Meets IEEE18, Standard (ANSI/IEEE Standard 18)
FIT (Failure In Time)	$\leq 300 \times 10^9$ component h
Maximum Short Circuit Current	10 kA (according to UL 810)
Mechanical and Electrical Safety	Pressure Interrupter (PI) disengages all 3 phases in the event of capacitor end of life or overload
Discharge Resistor Time	≤ 60 seconds ≤ 50 V for 600 V or less; over 600 V ≤ 5 minutes

RoHS Compliant

Dimensions

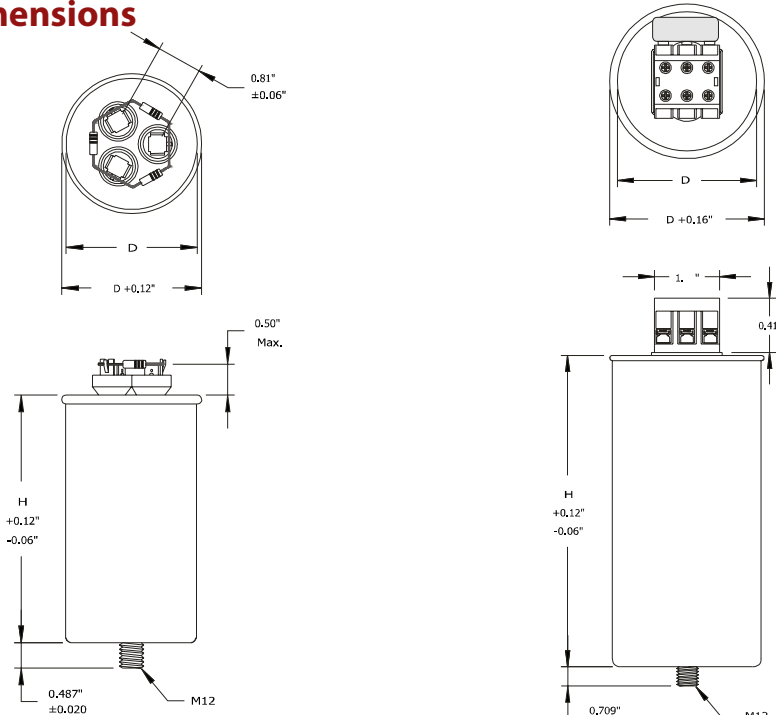


Figure 1

Figure 2

Construction Details

Case Material	Extruded aluminum with steel or aluminum cover
Encapsulation	Environmentally safe dielectric fluid
Terminal Material	Tin plated copper, brass or steel

Type PFCS, 3-Phase AC Power Factor Correction Capacitors

Part Numbering System

PFC	S	T	480	C	6	S	779	T
Type		Base Type	Voltage (Vac)	Case Material	kvar	Tolerance (%)	Can Height (inches)	Phases
PFC	S = Std.	S = 2" Round T = 2½" Round V = 3" Round X = 3.5" Round Y = 4.0" Round Z = 4.5" Round	24 = 240 48 = 480 60 = 600	C = Aluminum case w/steel cover M12 Stud D = Aluminum case w/aluminum cover M12 Stud	Full kvar value including decimals @ 60 Hz and	S = 0/+10%	Expressed as 3 digit rounded and displayed without decimal point	T = 3-Phase

Ratings

NOTE: Other ratings, sizes and performance specifications are available. Contact us.

CDE Catalog Number	60Hz		50Hz		Capacitance (µF)	Diameter (in)	Case Height (in)	Style
	Output Kvar	I _R (A)	Output Kvar	I _R (A)				
240Vac								
PFCSS24C0.5S572T	0.5	1.2	0.4	1.0	3 x 7.7	2.0	5.72	Fig. 1
PFCSS24C1.5S572T	1	2.4	0.8	2.0	3 x 15.4	2.0	5.72	
PFCSS24C1.5S572T	1.5	3.6	1.3	3.0	3 x 23.0	2.0	5.72	
PFCSS24C2.5S572T	2	4.8	1.7	4.0	3 x 30.7	2.0	5.72	
PFCSS24C2.5S572T	2.5	6.0	2.1	5.0	3 x 38.4	2.0	5.72	
PFCST24C3S572T	3	7.2	2.5	6.0	3 x 46.1	2.5	5.72	
PFCST24C4S572T	4	9.6	3.3	8.0	3 x 61.4	2.5	5.72	
PFCST24C5S778T	5	12.0	4.2	10.0	3 x 76.8	2.5	7.78	
480Vac								
PFCSS48C0.5S572T	0.5	0.6	0.4	0.5	3 x 1.9	2.0	5.72	Fig. 1
PFCSS48C1.5S572T	1	1.2	0.8	1.0	3 x 3.8	2.0	5.72	
PFCSS48C1.5S572T	1.5	1.8	1.3	1.5	3 x 5.8	2.0	5.72	
PFCSS48C2.5S572T	2	2.4	1.7	2.0	3 x 7.7	2.0	5.72	
PFCSS48C2.5S572T	2.5	3.0	2.1	2.5	3 x 9.6	2.0	5.72	
PFCSS48C3S572T	3	3.6	2.5	3.0	3 x 11.5	2.0	5.72	
PFCSS48C3S572T	3	3.6	2.5	3.0	3 x 11.5	2.0	5.72	
PFCSS48C3S572T	3	3.6	2.5	3.0	3 x 11.5	2.0	5.72	

Type PFCS, 3-Phase AC Power Factor Correction Capacitors

CDE Catalog Number	60Hz		50Hz		Capacitance (μ F)	Diameter (in)	Case		Style
	Output Kvar	I _R (A)	Output Kvar	I _R (A)			Height (in)	Height (in)	
480Vac									
PFCSS48C4S572T	4	4.8	3.3	4.0	3 x 15.4	2.0	5.72	Fig. 1	
PFCST48C5S572T	5	6.0	4.2	5.0	3 x 19.2	2.5	5.72		
PFCST48C6S572T	6	7.2	5.0	6.0	3 x 23.0	2.5	5.72		
PFCST48C7.5S778T	7.5	9.0	6.3	7.5	3 x 28.8	2.5	7.78		
PFCSV48D8.3S635T	8.3	10.0	6.9	8.3	3 x 31.9	3.0	6.35	Fig. 2	
PFCSV48D9S635T	9	10.8	7.5	9.0	3 x 34.5	3.0	6.35		
PFCSX48D10S635T	10	12.0	8.3	10.0	3 x 38.4	3.5	6.35		
PFCSV48D12.5S842T	12.5	15.0	10.4	12.5	3 x 48.0	3.0	8.42		
PFCSV48D15S108T	15	18.0	12.5	15.0	3 x 57.6	3.0	10.78		
PFCSV48D16.7S108T	16.7	20.1	13.9	16.7	3 x 64.1	3.0	10.78		
PFCSV48D18S108T	18	21.7	15.0	18.0	3 x 69.1	3.0	10.78		
PFCSV48D20S108T	20	24.1	16.7	20.0	3 x 76.8	3.0	10.78		
PFCSX48D25S108T	25	30.1	20.8	25.1	3 x 95.9	3.5	10.78		
PFCSX48D30S137T	30	36.1	25.0	30.1	3 x 115.1	3.5	13.73		
600Vac									
PFCSS60C1S572T	1	1.0	0.8	0.8	3 x 2.5	2.0	5.72	Fig. 1	
PFCSS60C1.5S572T	1.5	1.4	1.3	1.2	3 x 3.7	2.0	5.72		
PFCSS60C2S572T	2	1.9	1.7	1.6	3 x 4.9	2.0	5.72		
PFCSS60C2.5S572T	2.5	2.4	2.1	2.0	3 x 6.1	2.0	5.72		
PFCSS60C3S572T	3	2.9	2.5	2.4	3 x 7.4	2.0	5.72		
PFCSS60C4S572T	4	3.8	3.3	3.2	3 x 9.8	2.0	5.72		
PFCST60C5S572T	5	4.8	4.2	4.0	3 x 12.3	2.5	5.72		
PFCST60C6S572T	6	5.8	5.0	4.8	3 x 14.7	2.5	5.72		
PFCST60C6.1S572T	6.1	5.9	5.1	4.9	3 x 15.0	2.5	5.72		
PFCST60C6.3S572T	6.3	6.1	5.3	5.1	3 x 15.5	2.5	5.72		
PFCST60C6.9S778T	6.9	6.6	5.8	5.5	3 x 16.9	2.5	7.78		
PFCSV60D7.5S635T	7.5	7.2	6.3	6.0	3 x 18.4	3.0	6.35	Fig. 2	
PFCSV60D8.1S635T	8.1	7.8	6.8	6.5	3 x 19.9	3.0	6.35		
PFCSV60D8.3S635T	8.3	8.0	6.9	6.7	3 x 20.4	3.0	6.35		
PFCSX60D10S635T	10	9.6	8.3	8.0	3 x 24.6	3.5	6.35		
PFCSV60D12.2S842T	12.2	11.7	10.2	9.8	3 x 30.0	3.0	8.42		
PFCSV60D12.5S842T	12.5	12.0	10.4	10.0	3 x 30.7	3.0	8.42		
PFCSV60D13.8S842T	13.8	13.3	11.5	11.1	3 x 33.9	3.0	8.42		
PFCSV60D14.6S108T	14.6	14.0	12.2	11.7	3 x 35.9	3.0	10.78		
PFCSV60D15S108T	15	14.4	12.5	12.0	3 x 36.8	3.0	10.78		
PFCSV60D16.7S108T	16.7	16.1	13.9	13.4	3 x 41.0	3.0	10.78		
PFCSV60D17.5S108T	17.5	16.8	14.6	14.0	3 x 43.0	3.0	10.78		
PFCSV60D20S108T	20	19.2	16.7	16.0	3 x 49.1	3.0	10.78		
PFCSV60D22.5S108T	22.5	21.7	18.8	18.0	3 x 55.3	3.0	10.78		
PFCSX60D25S108T	25	24.1	20.8	20.0	3 x 61.4	3.5	10.78		
PFCSX60D30.2S137T	30.2	29.1	25.2	24.2	3 x 74.2	3.5	13.73		

Type PFCS, 3-Phase AC Power Factor Correction Capacitors

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.